


MF-H 系列 尺寸圖 / 表 L2

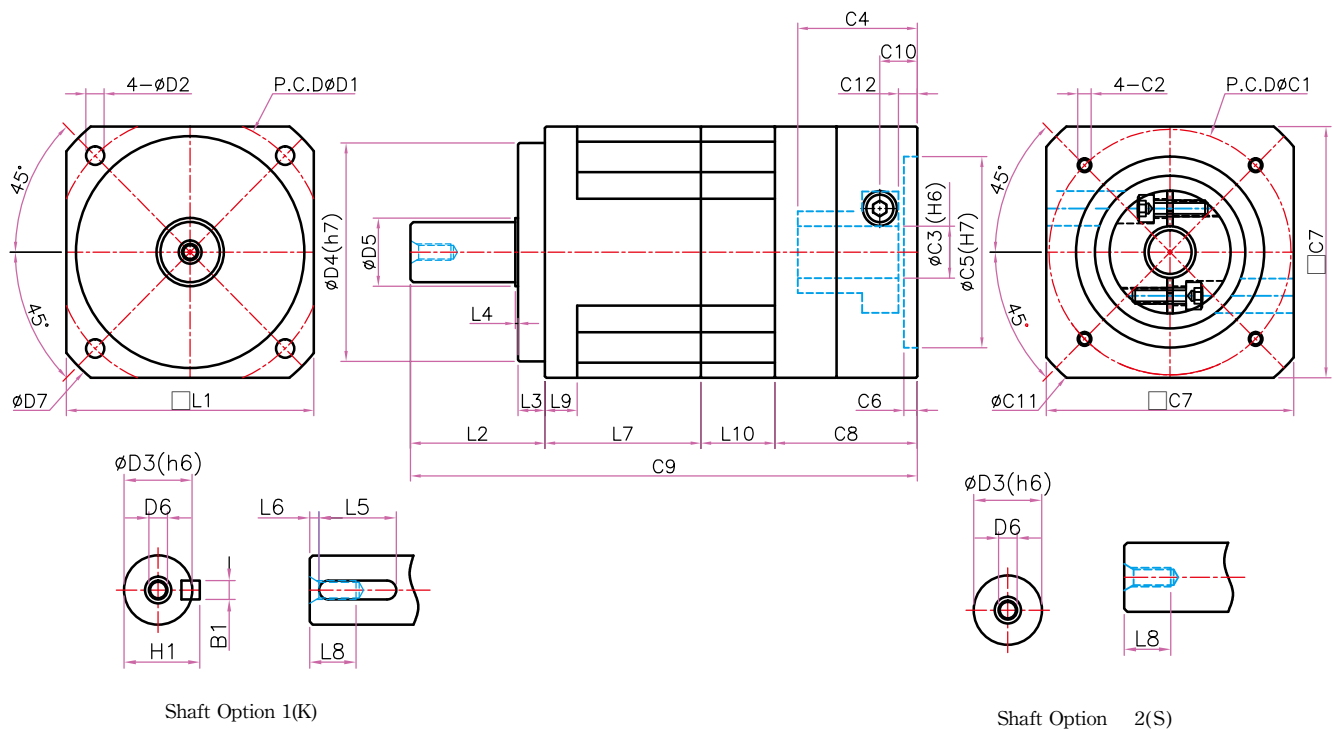

(單位:mm)

Size(mm)	MF40H-L2	MF60H-L2	MF90H-L2	MF120H-L2	MF150H-L2	MF150HS-L2	MF180H-L2	MF180HS-L2
D1	50	70	100	130	165	165	215	215
D2	3.5	5.5	6.8	8.7	11	11	13	13
D3	13	16	22	32	38	38	50	50
D4	35	50	80	110	130	130	160	160
D5	15	18	25	35	40	40	60	60
D6	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M12x1.75P	M12x1.75P	M12x1.75P	M12x1.75P
D7	55	80	118	158	190	190	245	245
L1	42	60	92	120	142	142	182	182
L2	25.5	35.5	50	65	75	86	95	105
L3	5.5	7.5	10	12	4	15	10	20
L4	0.5	1.5	1	1	3	3	2	2
L5	15	20	25	40	45	45	70	70
L6	2	3	5	3	5	5	6	6
L7	33.5	49	58	69	90	79	95.5	85.5
L8	8	12	15	20	32	32	42	42
L9	7	10	12	15	15	12	15	15
L10	19	16	27.5	33.2	46	46	51.5	51.5
C1	46	70	90	145	200	200	200	200
C2	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M12x1.75P	M12x1.75P	M12x1.75P	M12x1.75P
C3	5~8	6~14	14~19	16~24	19~42	19~42	19~42	19~42
C4	28	33	39	65	88.5	88.5	85	85
C5	30	50	70	110	114.3	114.3	114.3	114.3
C6	4	4	5	7	6	6	10	10
C7	42	62	92	120	176	176	182	182
C8	34	39.5	49	78	98	98	100	100
C9	112	140	184.5	245.2	309	309	342	342
C10	12.5	13	15	28.5	47	47	33.5	33.5
C11	56	80	120	160	240	240	240	240
C12	7.5	7	7	20	35	35	17	17
B1	4	5	6	10	10	10	14	14
H1	14.5	18	24.5	35	41	41	53.5	53.5

以上C1~C12為標準的連接法蘭尺寸，實際尺寸會因馬達型號不同而變動，入力馬達記號如附表第151-152頁除MF150H-MF180H本體為圓型本體外，其餘皆為四方型本體