


CV . . S . SB 立式附三相減速馬達外型尺寸圖

■ CV..S 立式附三相鋁/鐵殼(剎車)馬達減速機

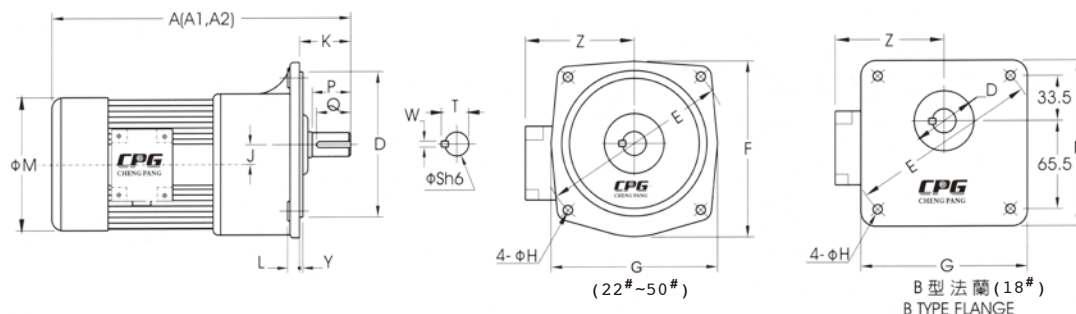

出力軸尺寸 OUTPUT SHAFT

出力軸 SHAFT	鍵槽 KEYWAY				鍵 KEY
Sh6	P	W	T	Q	SPEC'
Φ18	30	5	20.2	27	5*5*27
Φ22	40	7	25	35	7*7*35
Φ28	45	7	31.1	40	7*7*40
Φ32	55	10	35.5	50	10*8*50
Φ40	65	10	43.5	60	10*8*60
Φ50	80	14	54	75	14*9*75

DIMENSIONS (M/M)

適用機型：CV..S, CV..ST, CV..SB, CV..STB

馬力 KW	減速比 RATIO	本體 CODE	型番 SIZE(S)	A	A1	A2	D	E	F	G	H	J	K	L	M	Y	Z
100W 1/8 HP	3-50	1 #	*18	250	250	250	50	140	120	120	9	16	40	12	133	6	120
	60-200	2 #	22	280	280	280	148	185	175	165	11	17.5	48	12	133	3	120
200W 1/4 HP	3-10	1 #	*18	285	285	285	50	140	120	120	9	16	40	12	133	6	120
	15-90	2 #	22	315	315	315	148	185	175	165	11	17.5	48	12	133	3	120
	100-200	3 #	28	350	350	350	170	220	205	195	12	23	58	13	133	3	120
400W 1/2 HP	3-10	2 #	22	330	330	330	148	185	175	165	11	17.5	48	12	167	3	135
	15-90	3 #	28	360	360	360	170	220	205	195	12	23	58	13	167	3	135
	100-200	4 #	32	395	395	395	185	255	248	225	13	30	65	16	167	3	135
750W 1 HP	3-25	3 #	28	380	380	380	170	220	205	195	12	23	58	13	167	3	135
	30-120	4 #	32	410	410	410	185	255	248	225	13	30	65	16	167	3	135
	125-200	5 #	40	465	465	465	230	310	290	273	15	36	85	21	167	5	135
1500W 2 HP	3-30	4 #	32	450	450	450	185	255	248	225	15	30	65	16	192	3	146
	40-100	5 #	40	510	510	510	230	310	290	273	15	36	85	21	192	5	146
	110-180	6 #	50	560	560	560	280	390	372	345	18	51	92	25	192	5	146
2200W 3 HP	3-40	5 #	40	520	520	520	230	310	290	273	15	36	85	21	220	5	160
	45-100	6 #	50	580	580	580	280	390	372	345	18	51	92	25	220	5	160
3700W 5 HP	3-10	5 #	40	560	560	560	230	310	290	273	15	36	85	21	220	5	160
	15-60	6 #	50	620	620	620	280	390	372	345	18	51	92	25	220	5	160

備註：A：三相鋁殼馬達，WITH 3-PHASE ALUMINUM MOTOR.

A1：三相鐵殼馬達，WITH 3-PHASE STEEL PLATE MOTOR.

A2：三相馬達附剎車器，WITH 3-PHASE BRAKE MOTOR.

*：屬於B型出力法蘭，BELONG TO B TYPE OUTPUT FLANGE.