


CV..S..SB 立式附三相減速馬達外型尺寸圖

■ CV..S 立式機型高速比附三相鋁/殼(剎車)馬達減速機

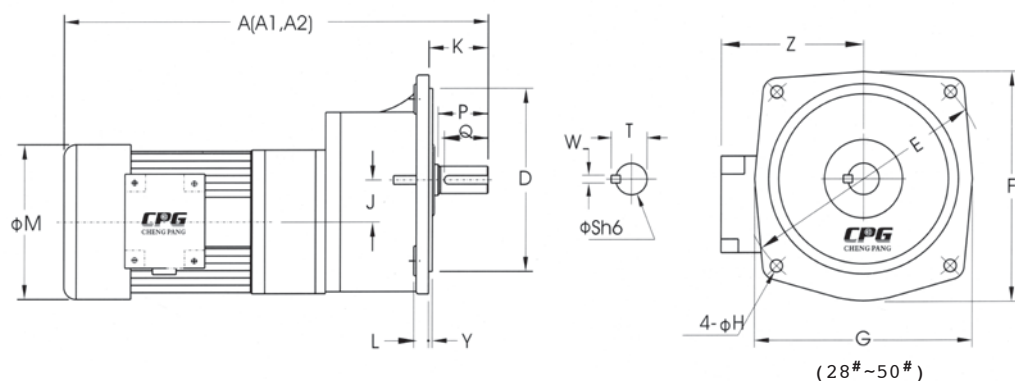

出力軸尺寸 OUTPUT SHAFT					
出力軸 SHAFT	鍵槽 KEYWAY				鍵 KEY
Sh6	P	W	T	Q	SPEC
28	45	7	31.1	40	7*7*40
32	55	10	35.5	50	10*8*50
40	65	10	43.5	60	10*8*60
50	80	14	54	75	14*9*75

適用機型：CV..S, CV..ST, CV..SB, CV..STB

DIMENSIONS (M/M)

馬力 KW	減速比 RATIO	本體 CODE	型番 SIZE(S)	A	A1	A2	D	E	F	G	H	J	K	L	M	Y	Z
100W 1/8 HP	250-1800	1#~3#	28	370	370	370	170	220	205	195	12	39	58	13	133	3	120
200W 1/4 HP	250-1800	2#+4#	32	470	470	470	185	255	248	225	15	47.5	65	16	133	3	120
400W 1/2 HP	250-1800	3#+5#	40	550	550	550	230	310	290	273	15	59	85	21	167	5	135
750W 1 HP	250-1800	3#+6#	50	620	620	620	280	390	372	345	18	74	92	25	167	5	135

備註：A：三相鋁殼馬達，WITH 3-PHASE ALUMINUM MOTOR.
A1：三相鐵殼馬達，WITH 3-PHASE STEEL PLATE MOTOR.
A2：三相馬達附剎車器，WITH 3-PHASE BRAKE MOTOR.