


CVM 立式直結型減速機外型尺寸圖

CVM 立式入力法蘭齒輪減速機

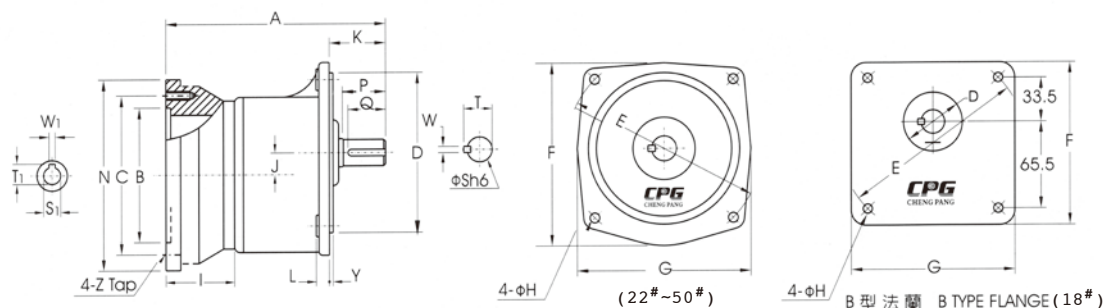

入力孔尺寸INPUT BORE				
馬力 KW	入力孔 BORE	鍵槽 KEYWAY		
	Sh F7	W1	T1	
1/4 HP	11	4	12.8	
1/2 HP	14	5	16.3	
1 HP	19	6	21.8	
2 HP	24	8	27.3	
3 HP	28	8	31.3	
5 HP	28	8	31.3	

出力軸尺寸OUTPUT SHAFT						
出力軸 SHAFT	鍵槽 KEYWAY				鍵 KEY	
Sh h6	P	W	T	Q	SPEC'	
18	30	5	20.2	27	5*5*27	
22	40	7	25	35	7*7*35	
28	45	7	31.1	40	7*7*40	
32	55	10	35.5	50	10*8*50	
40	65	10	43.5	60	10*8*60	
50	80	14	54	75	14*9*75	

DIMENSIONS (M/M)

馬力 KW	減速比 RATIO	型番 SIZE(S)	A	B	C	D	E	F	G	H	I	J	K	L	N	Y	Z
200W 1/4 HP	3-10	*18	160	110	130	50	140	120	120	9	55	16	40	12	160	6	M8
	15-90	22	195	110	130	148	185	175	165	11	55	17.5	48	12	160	3	M8
	100-200	28	225	110	130	170	220	205	195	12	55	23	58	13	160	3	M8
400W 1/2 HP	3-10	22	195	110	130	148	185	175	165	11	55	17.5	48	12	160	3	M8
	15-90	28	225	110	130	170	220	205	195	12	55	23	58	13	160	3	M8
	100-200	32	255	110	130	185	255	248	225	15	55	30	65	16	160	3	M8
750W 1 HP	3-25	28	250	130	165	170	220	205	195	12	82	23	58	13	200	3	M10
	30-120	32	285	130	165	185	255	248	225	15	82	30	65	16	200	3	M10
	125-200	40	330	130	165	230	310	290	273	15	82	36	85	21	200	5	M10
1500W 2 HP	3-30	32	285	130	165	185	255	248	225	15	82	30	65	16	200	3	M10
	40-100	40	330	130	165	230	310	290	273	15	82	36	85	21	200	5	M10
	105-120	50	385	130	165	280	390	372	345	18	82	51	92	25	200	5	M10
2200W 3 HP	3-40	40	355	180	215	230	310	290	273	15	105	36	85	21	250	5	M12
	45-100	50	410	180	215	280	390	372	345	18	105	51	92	25	250	5	M12
3700W 5 HP	3-10	40	355	180	215	230	310	290	273	15	105	36	85	21	250	5	M12
	15-60	50	410	180	215	280	390	372	345	18	105	51	92	25	250	5	M12

備註：1. 配合IEC馬達為主，AVAILABLE FOR IEC METRIC MOTOR.

2. * 屬於B型出力法蘭，* BELONG TO B TYPE OUTPUT FLANGE.