



CV 城邦立式標準 IEC 馬達外型尺寸圖

CV..S 城邦立式標準IEC三相鋁殼(剎車)馬達

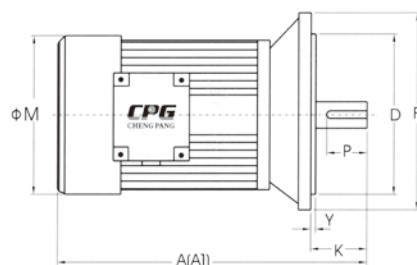

DIMENSIONS (MM)



適用機型: CV..S, CV..SB, CV..ST, CV..STB

輸出馬力 CAPACITY 4P	框號 FRAME	A	A1	D	E	F	H	K	M	P	S	T	W	Y	重量 WEIGHT
1/8HP	56	210	210	110	130	160	10	23	133	10	11	12.5	4	3.5	6.8
1/4HP	63	240	240	110	130	160	10	23	133	10	11	12.5	4	3.5	8.1
1/2HP	71	275	275	110	130	160	12	30	143	14	14	16	5	3.5	10.6
1HP	80	285	285	130	165	200	12	40	167	25	19	21.5	6	3.5	13.0
2HP	90L	370	370	130	165	200	12	50	192	32	24	27	8	3.5	21.5
3HP	100L	410	410	180	215	250	14.5	60	220	40	28	31	8	4	28.0
5HP	112L	450	450	180	215	250	14.5	60	220	40	28	31	8	4	34.5

A1: 三相鋁框馬達附剎車器, WITH 3-PHASE ALUMINUM BRAKE MOTOR.

29) CV..AT 城邦立式標準IECD單相鐵殼(剎車)馬達

CV..AT CHENG BANG IEC VERTICAL 1-PHASE STEEL PLATE (BRAKE) MOTOR

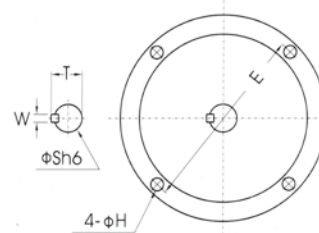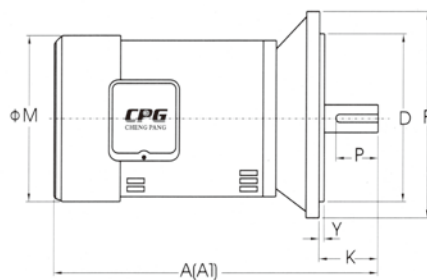

適用機型: CV..AT, CV..ATB, CV..A, CV..AB

輸出馬力 CAPACITY 4P	框號 FRAME	A	A1	D	E	F	H	K	M	P	S	T	W	X	Y	重量 WEIGHT
1/8HP	--	204	---	110	130	160	10	23	127	10	11	12.5	4	---	3.5	7.0
1/4HP	63	238	---	110	130	160	10	23	127	10	11	12.5	4	---	3.5	8.2
1/2HP	71	254	284	110	130	160	12	30	167	14	14	16	5	42	3.5	9.1
1HP	80	281	311	130	165	200	12	40	167	25	19	21.5	6	48	3.5	12.5

備註: 1. A=屬單相文電機型 FOR CAPACITOR RUNNING

2. A1=屬於單相離心開關機型 FOR CENTRIFUGAL RUNNING

3. 單相馬達尺寸另議 CONTACT FOR BRAKE TYPE DIMENSIONS