


蝸輪-單段系統- PAE

PAE40~PAE200

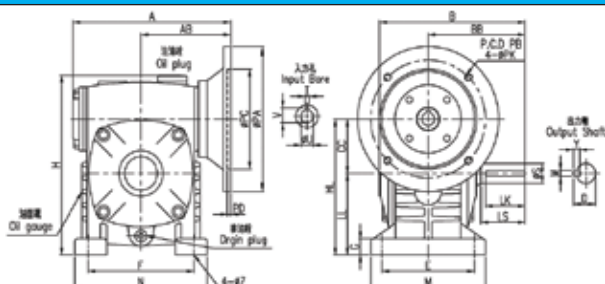

軸配置 SHAFT DIRECTION

R		L		D	
RI		LI		K	

尺寸表 DIMENSION *in millimeter

型 號 Size	減 速 比 Ratio	A	AB	B	BB	CC	E	F	H	HL	LL	M	N	G	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					出力軸 Output Shaft				重 量 (Kg)	油 量 (l)
																HP	KW	U	T	V	PA	PB	PC	PD	PK	LS	S	D	W×Y×LK		
40		135	80	107	72	40	55	95	115	90	50	80	120	13	9	0.25	0.2	11	4	12.5	160	130	110	5	M8	30	15	17	5x5x25	6.0	0.20
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	145	95	50	95	110	180	130	80	120	140	15	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	40	17	19	5x5x35	6.6	0.31
60		180	102	165	110	60	105	120	210	150	90	130	150	18	11	0.25 0.5	0.2 0.4	11 14	4 5	12.5 16	160	130	110	5	M8	50	22	25	7x7x45	8.4	0.42
70		212	117	195	130	70	115	150	240	175	105	150	190	20	15	0.5	0.4	14	5	16	160	130	110	5	M8	60	28	31	7x7x55	13.9	0.77
		1	0.75	19	6	21.5	200	165	130	5	M10																				
		80	233	129	210	140	80	135	180	270	200	120	170	220	24	15	1	0.75	19	6	21.5	200	165	130	5	M10	65	32	35	10x8x60	20.0
100		295	160	260	170	100	155	220	340	250	150	190	270	25	15	2	1.5	24	8	27	200	165	130	5	M10	75	38	41	10x8x65	35.0	2.31
120	334	175	290	190	120	180	260	405	300	180	230	320	30	18	3	2.2	28	8	31	250	215	180	5	M12							
135		380	202	320	210	135	200	290	455	350	215	250	350	30	18	5	3.7	28	8	31	250	215	180	5	M12	95	55	60	15x10x80	79.0	4.10
																7.5	5.5	38	10	41	300	265	230	5	M12						
155		437	232	387	252	155	220	320	490	390	235	280	390	35	20	7.5	5.5	38	10	41	300	265	230	5	M12	110	60	65	15x10x95	128	6.20
175		477	252	410	262	175	250	350	565	435	260	310	420	40	20	10	7.5	38	10	41	300	265	230	5	M12	110	65	69	18x11x95	162	8.00
200		508	270	458	305	200	290	350	625	490	290	350	420	42	22	15	11	42	12	45	350	300	250	6	M16	125	70	74.5	20x12x110	220	9.50