


蝸輪-單段系統- PBE

PBE50~PBE200

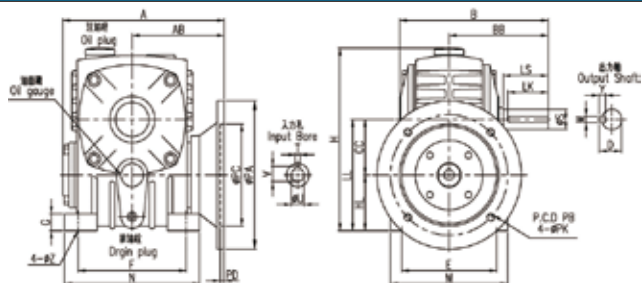

軸配置 SHAFT DIRECTION

R		L		D	
RI		LI		K	

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	A	AB	B	BB	CC	E	F	H	HL	LL	M	N	G	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					出力軸 Output Shaft				重量 (Kg)	油量 (l)
		HP	KW	U	T	V	PA	PB	PC	PD	PK	LS	S	D	W×Y×LK																
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	145	95	50	95	110	180	50	100	120	140	15	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	40	17	19	5x5x35	6.4	0.24
60		180	102	165	110	60	105	120	210	60	120	130	150	18	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	50	22	25	7x7x45	8.3	0.33
		0.5	0.4	14	5	16																									
70		212	117	195	130	70	115	150	240	70	140	150	190	20	15	0.5	0.4	14	5	16	160	130	110	5	M8	60	28	31	7x7x55	14.5	0.51
		1	0.75	19	6	21.5	200	165	130	5	M10																				
80		233	129	210	140	80	135	180	270	80	160	170	220	24	15	1	0.75	19	6	21.5	200	165	130	5	M10	65	32	35	10x8x60	20.0	0.77
		2	1.5	24	8	27																									
100		295	160	260	170	100	155	220	340	100	200	190	270	25	15	2	1.5	24	8	27	200	165	130	5	M10	75	38	41	10x8x65	31.0	1.49
		3	2.2	28	8	31	250	215	180	5	M12																				
120		334	175	290	190	120	180	260	405	120	240	230	320	30	18	3	2.2	28	8	31	250	215	180	5	M12	85	45	48	12x8x70	56.0	2.35
		5	3.7	28	8	31																									
135		380	202	320	210	135	200	290	455	135	270	250	350	30	18	5	3.7	28	8	31	250	215	180	5	M12	95	55	60	15x10x80	77.0	3.20
	7.5	5.5	38	10	41	300	265	230	5	M12																					
155		437	232	387	252	155	220	320	490	135	290	280	390	35	20	7.5	5.5	38	10	41	300	265	230	5	M12	110	60	65	15x10x95	128	3.60
175		477	252	410	262	175	250	350	565	160	335	310	420	40	20	10	7.5	38	10	41	300	265	230	5	M12	110	65	69	18x11x95	162	4.50
200		508	270	458	305	200	290	350	625	175	375	350	420	42	22	15	11	42	12	45	350	300	250	6	M16	125	70	74.5	20x12x110	220	6.40