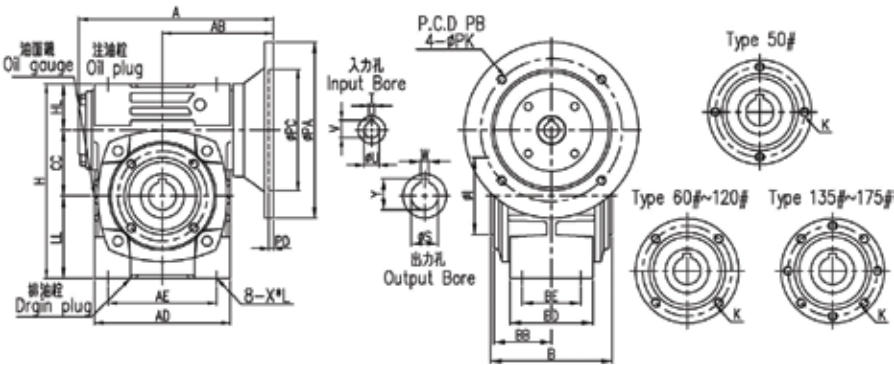


蝸輪-單段系統- MPHN

MPHN50~MPHN175		軸配置 SHAFT DIRECTION	
			A
			B
			AI
			BI

尺寸表 DIMENSION *in millimeter																															
型號 Size	減速比 Ratio	A	AB	AD	AE	B	BB	BD	BE	CC	H	HL	I	K	LL	X*L	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					中空出力軸 Output Hollow			重量 (Kg)	油量 (l)
		HP	KW	U	T	V	PA	PB	PC	PD	PK	S	W	Y																	
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	115	90	99	46.5	68	50	50	150	35	58	Ø76*4-M6	65	M8*16	0.25	0.2	11	4	12.5	160	130	110	5	M8	20	6	22.5	5.8	0.31
60		180	102	127	100	112	53	78	54	60	177	42	70	Ø82*4-M8	75	M10*20	0.25	0.2	11	4	12.5	160	130	110	5	M8	25	7	28	7.1	0.44
70		212	117	156	125	131	62	88	66	70	205	50	80	Ø100*4-M8(M10)	85	M10*20	0.5	0.4	14	5	16	160	130	110	5	M8	30	7	33	13.0	0.70
80		233	129	176	145	144	68	101	75	80	232	60	95	Ø115*4-M10	92	M10*20	1	0.75	19	6	21.5	200	165	130	5	M10	35	10	38	18.0	0.99
100		295	160	227	185	175	83	115	85	100	290	75	110	Ø130*4-M12	115	M12*24	2	1.5	24	8	27	200	165	130	5	M10	40	12	43	36.0	1.87
120		334	175	264	220	200	95	132	100	120	370	95	130	Ø165*4-M12	155	M14*28	3	2.2	28	8	31	250	215	180	5	M12	45	14	48.5	55.0	4.10
135		380	202	304	260	216	102.5	144	110	135	425	105	130	Ø200*8-M12	185	M16*32	5	3.7	28	8	31	250	215	180	5	M12	55	15	60	75.0	4.40
155		437	232	340	280	270	109	160	120	155	423	103	180	Ø215*8-M12	165	M16*40	7.5	5.5	38	10	41	300	265	230	5	M12	65	18	69	89.0	7.00
175		477	252	370	320	300	137	186	140	175	521	123	230	Ø265*8-M12	223	M16*40	10	7.5	38	10	41	300	265	230	5	M12	80	22	85	130	8.00