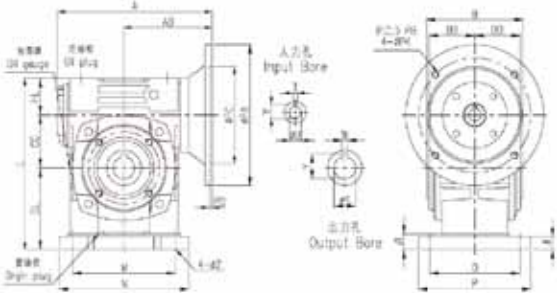


蝸輪-單段系統- MPHA

MPHA50~MPHA175		軸配置 SHAFT DIRECTION	
			
			I

尺寸表 DIMENSION *in millimeter																															
型號 Size	減速比 Ratio	A	AB	B	BB	CC	DL	HL	J	J1	L	M	N	O	P	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					中空出力軸 Output Hollow			重量 (Kg)	油量 (l)
																	HP	KW	U	T	V	PA	PB	PC	PD	PK	S	W	Y		
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	99	46.5	50	80	35	13	15	165	110	140	95	120	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	20	6	22.5	6.0	0.31
																											25	7	28		
60		180	102	112	53	60	93	42	15	18	195	120	150	105	130	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	25	7	28	7.4	0.44
																	0.5	0.4	14	5	16										
70		212	117	131	62	70	105	50	18	20	225	150	190	115	150	15	0.5	0.4	14	5	16	160	130	110	5	M8	30	7	33	14.4	0.70
																	1	0.75	19	6	21.5	200	165	130	5	M10					
80		233	129	144	68	80	112	60	18	20	252	180	220	135	170	15	1	0.75	19	6	21.5	200	165	130	5	M10	35	10	38	20.0	0.99
																	2	1.5	24	8	27										
100		295	160	175	83	100	140	75	22	25	315	220	270	155	190	15	2	1.5	24	8	27	200	165	130	5	M10	40	12	43	39.0	1.87
																	3	2.2	28	8	31	250	215	180	5	M12					
120		334	175	200	95	120	180	95	22	25	395	260	320	180	230	18	3	2.2	28	8	31	250	215	180	5	M12	45	14	48.5	60.0	4.10
																	5	3.7	28	8	31										
135		380	202	216	102.5	135	215	105	27	30	455	290	350	200	250	18	5	3.7	28	8	31	250	215	180	5	M12	55	15	60	81.0	4.40
																	7.5	5.5	38	10	41	300	265	230	5	M12					
155		437	232	270	109	155	197	103	28	32	455	320	380	220	280	20	7.5	5.5	38	10	41	300	265	230	5	M12	65	18	69	96.0	7.00
175		477	252	300	137	175	260	123	32	37	558	350	410	250	310	20	10	7.5	38	10	41	300	265	230	5	M12	80	22	85	140.0	8.00