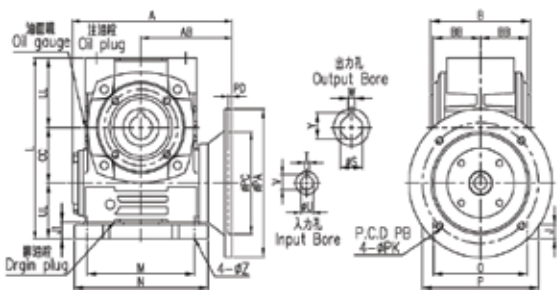


蝸輪-單段系統- MPH

MPHB50~MPHB175		軸配置 SHAFT DIRECTION	
			
			I

尺寸表 DIMENSION *in millimeter																															
型號 Size	減速比 Ratio	A	AB	B	BB	CC	J	J1	L	LL	M	N	O	P	UL	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					中空出力軸 Output Hollow			重量 (Kg)	油量 (l)
																	HP	KW	U	T	V	PA	PB	PC	PD	PK	S	W	Y		
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	99	46.5	50	13	15	165	65	110	140	95	120	50	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	20 25	6 7	22.5 28	6.0	0.31
60		180	102	112	53	60	15	18	195	75	120	150	105	130	60	11	0.25 0.5	0.2 0.4	11 14	4 5	12.5 16	160	130	110	5	M8	25	7	28	7.4	0.44
70		212	117	131	62	70	18	20	225	85	150	190	115	150	70	15	0.5 1	0.4 0.75	14 19	5 6	16 21.5	160 200	130 165	110 130	5 5	M8 M10	30	7	33	14.4	0.70
80		233	129	144	68	80	18	20	252	92	180	220	135	170	80	15	1 2	0.75 1.5	19 24	6 8	21.5 27	200	165	130	5	M10	35	10	38	20.0	0.99
100		295	160	175	83	100	22	25	315	115	220	270	155	190	100	15	2 3	1.5 2.2	24 28	8 8	27 31	200 250	165 215	130 180	5 5	M10 M12	40	12	43	39.0	1.87
120		334	175	200	95	120	22	25	395	155	260	320	180	230	120	18	3 5	2.2 3.7	28 28	8 8	31 31	250	215	180	5	M12	45	14	48.5	60.0	4.10
135		380	202	216	102.5	135	27	30	455	185	290	350	200	250	135	18	5 7.5	3.7 5.5	28 38	8 10	31 41	250 300	215 265	180 230	5 5	M12 M12	55	15	60	81.0	4.40
155		437	232	270	109	155	28	32	455	165	320	380	220	280	135	20	7.5	5.5	38	10	41	300	265	230	5	M12	65	18	69	96.0	7.00
175		477	252	300	137	175	32	37	558	223	350	410	250	310	160	20	10	7.5	38	10	41	300	265	230	5	M12	80	22	85	140.0	8.00