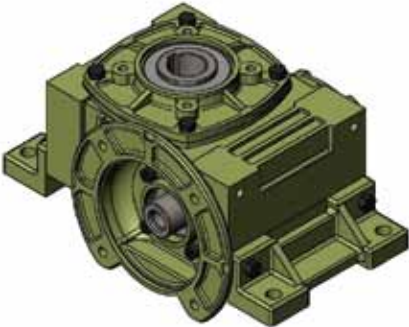
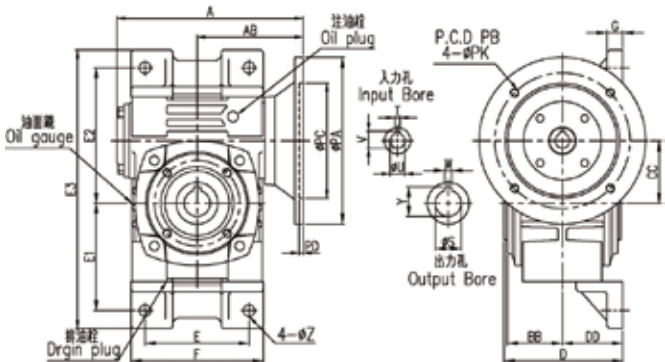


蝸輪-單段系統- MPHV

MPHV50~MPHV175		軸配置 SHAFT DIRECTION	
			R
			L
			RI
			LI

尺寸表 DIMENSION *in millimeter																													
型號 Size	減速比 Ratio	A	AB	BB	CC	D	DD	E	E1	E2	E3	F	G	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					中空出力軸 Output Hollow			重量 (Kg)	油量 (l)
															HP	KW	U	T	V	PA	PB	PC	PD	PK	S	W	Y		
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	155	85	46.5	50	101.5	52	90	92	112	236	115	14	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	20	6	22.5	6.8	0.31
60		180	102	53	60	114	58	100	103	130	265	127	15	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	25	7	28	8.4	0.44
															0.5	0.4	14	5	16										
70		212	117	62	70	133.5	68	120	120	155	305	156	20	15	0.5	0.4	14	5	16	160	130	110	5	M8	30	7	33	15.0	0.70
															1	0.75	19	6	21.5	200	165	130	5	M10					
80		233	129	68	80	147	75	140	132	180	342	176	20	15	1	0.75	19	6	21.5	200	165	130	5	M10	35	10	38	21.0	0.99
															2	1.5	24	8	27										
100		295	160	83	100	177.5	90	190	155	215	400	227	20	15	2	1.5	24	8	27	200	165	130	5	M10	40	12	43	41.0	1.87
															3	2.2	28	8	31	250	215	180	5	M12					
120		334	175	95	120	205	105	220	200	260	505	264	25	18	3	2.2	28	8	31	250	215	180	5	M12	45	14	48.5	61.0	4.10
															5	3.7	28	8	31										
135		380	202	102.5	135	221	113	260	235	290	570	304	30	18	5	3.7	28	8	31	250	215	180	5	M12	55	15	60	83.0	4.40
															7.5	5.5	38	10	41	300	265	230	5	M12					
155		437	232	109	155	270	135	280	217	310	583	340	35	20	7.5	5.5	38	10	41	300	265	230	5	M12	65	18	69	105.0	7.00
175		477	252	137	175	310	160	320	290	365	715	380	40	20	10	7.5	38	10	41	300	265	230	5	M12	80	22	85	145.0	8.00