


蝸輪-單段系統- MPHSN

MPHSN40~ MPHSN 175

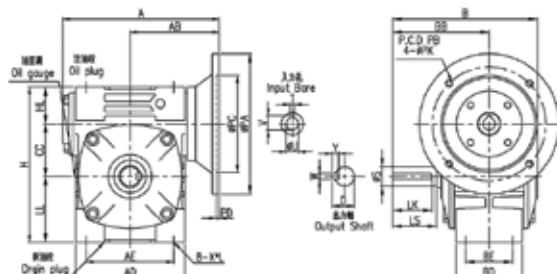

軸配置 SHAFT DIRECTION

AR		AL		ARI		ALI	
BR		BL		BRI		BLI	
AD		BD		ADI		BDI	

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	A	AB	AD	AE	B	BB	BD	BE	CC	H	HL	LL	X*L	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					出力軸 Output Shaft				重量 (Kg)	油量 (l)
															HP	KW	U	T	V	PA	PB	PC	PD	PK	LS	S	D	W×Y×LK		
40		140	78.5	102	80	130	84	68	54	40	127	34	53	M8*16	0.25	0.2	11	4	12.5	160	130	110	5	M8	35	15	17	5x5x30	5.0	0.18
50		155	85	115	90	145	95	68	50	50	150	35	65	M8*16	0.25	0.2	11	4	12.5	160	130	110	5	M8	40	17	19	5x5x35	5.8	0.31
60		180	102	127	100	165	110	78	54	60	177	42	75	M10*20	0.25	0.2	11	4	12.5	160	130	110	5	M8	50	22	25	7x7x45	7.1	0.44
															0.5	0.4	14	5	16	160	130	110	5	M8	50	22	25	7x7x45	7.1	0.44
70	(特殊) 1:5	212	117	156	125	195	130	88	66	70	205	50	85	M10*20	0.5	0.4	14	5	16	160	130	110	5	M8	60	28	31	7x7x55	13.0	0.70
															1	0.75	19	6	21.5	200	165	130	5	M10	60	28	31	7x7x55	13.0	0.70
80	標準 1:10 1:15 1:20	233	129	176	145	210	140	101	75	80	232	60	92	M10*20	1	0.75	19	6	21.5	200	165	130	5	M10	65	32	35	10x8x60	18.0	0.99
															2	1.5	24	8	27	200	165	130	5	M10	65	32	35	10x8x60	18.0	0.99
100	1:30 1:40 1:50 1:60	295	160	227	185	260	170	115	85	100	290	75	115	M12*24	2	1.5	24	8	27	200	165	130	5	M10	75	38	41	10x8x65	36.0	1.87
															3	2.2	28	8	31	250	215	180	5	M12	75	38	41	10x8x65	36.0	1.87
120		334	175	264	220	290	190	132	100	120	370	95	155	M14*28	3	2.2	28	8	31	250	215	180	5	M12	85	45	48	12x8x70	55.0	4.10
															5	3.7	28	8	31	250	215	180	5	M12	85	45	48	12x8x70	55.0	4.10
135		380	202	296	260	320	210	144	110	135	425	105	185	M16*32	5	3.7	28	8	31	250	215	180	5	M12	95	55	60	15x10x80	75.0	4.40
															7.5	5.5	38	10	41	300	265	230	5	M12	95	55	60	15x10x80	75.0	4.40
155		437	232	340	280	387	252	160	120	155	423	103	165	M16*40	7.5	5.5	38	10	41	300	265	230	5	M12	110	60	65	15x10x95	92.0	7.00
175		477	252	370	320	410	262	186	140	175	521	123	223	M16*40	10	7.5	38	10	41	300	265	230	5	M12	110	65	69	18x11x95	135	8.00