


蝸輪-單段系統- MPHSA

MPHSA40~ MPHSA 175

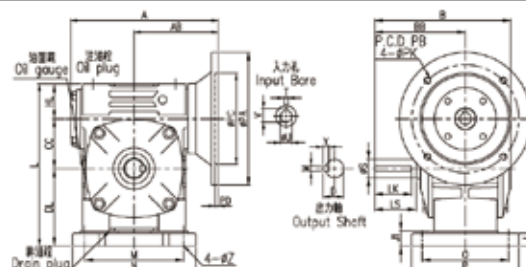

軸配置 SHAFT DIRECTION

R		L		D	
RI		LI		K	

尺寸表 DIMENSION *in millimeter

型 號 Size	減 速 比 Ratio	A	AB	B	BB	CC	DL	HL	J	J1	L	M	N	O	P	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					出力軸 Output Shaft				重 量 (Kg)	油 量 (l)
		HP	KW	U	T	V	PA	PB	PC	PD	PK	LS	S	D	W×Y×LK																	
40	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	140	78.5	130	84	40	66	34	11	13	140	100	125	90	110	10	0.25	0.2	11	4	12.5	160	130	110	5	M8	35	15	17	5x5x30	5.4	0.18
50		155	85	145	95	50	80	35	13	15	165	110	140	95	120	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	40	17	19	5x5x35	6.0	0.31
60		180	102	165	110	60	93	42	15	18	195	120	150	105	130	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	50	22	25	7x7x45	7.4	0.44
		0.5	0.4	14	5	16																										
70		212	117	195	130	70	105	50	18	20	225	150	190	115	150	15	0.5	0.4	14	5	16	160	130	110	5	M8	60	28	31	7x7x55	14.4	0.70
		1	0.75	19	6	21.5	200	165	130	5	M10																					
80		233	129	210	140	80	112	60	18	20	252	180	220	135	170	15	1	0.75	19	6	21.5	200	165	130	5	M10	65	32	35	10x8x60	20.0	0.99
		2	1.5	24	8	27																										
100		295	160	260	170	100	140	75	22	25	315	220	270	155	190	15	2	1.5	24	8	27	200	165	130	5	M10	75	38	41	10x8x65	39.0	1.87
		3	2.2	28	8	31	250	215	180	5	M12																					
120	334	175	290	190	120	180	95	22	25	395	260	320	180	230	18	3	2.2	28	8	31	250	215	180	5	M12	85	45	48	12x8x70	60.0	4.10	
	5	3.7	28	8	31																											
135	380	202	320	210	135	215	105	27	30	455	290	350	200	250	18	5	3.7	28	8	31	250	215	180	5	M12	95	55	60	15x10x80	91.0	4.40	
	7.5	5.5	38	10	41	300	265	230	5	M12																						
155	437	232	387	252	155	197	103	28	32	455	320	380	220	280	20	7.5	5.5	38	10	41	300	265	230	5	M12	110	60	65	15x10x95	95.0	7.00	
175	477	252	410	262	175	260	123	32	37	558	350	410	250	310	20	10	7.5	38	10	41	300	265	230	5	M12	110	65	69	18x11x95	145	8.00	