


蝸輪-單段系統- MPHSB

MPHSB40~ MPHSB 175

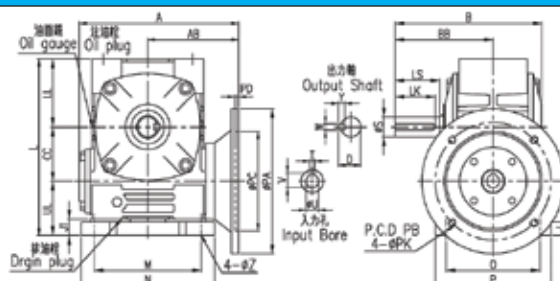

軸配置 SHAFT DIRECTION

R		L		D	
RI		LI		K	

尺寸表 DIMENSION *in millimeter

型 號 Size	減 速 比 Ratio	A	AB	B	BB	CC	J	J1	L	LL	M	N	O	P	UL	Z	馬力 Power		入力孔 Input Bore			入力法蘭 Input Adapter					出力軸 Output Shaft				重 量 (Kg)	油 量 (l)
		HP	KW	U	T	V	PA	PB	PC	PD	PK	LS	S	D	W×Y×LK																	
40	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	140	78.5	130	84	40	11	13	140	53	100	125	90	110	47	10	0.25	0.2	11	4	12.5	160	130	110	5	M8	35	15	17	5x5x30	5.4	0.18
50		155	85	145	95	50	13	15	165	65	110	140	95	120	50	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	40	17	19	5x5x35	6.0	0.31
60		180	102	165	110	60	15	18	195	75	120	150	105	130	60	11	0.25	0.2	11	4	12.5	160	130	110	5	M8	50	22	25	7x7x45	7.4	0.44
																	0.5	0.4	14	5	16											
70		212	117	195	130	70	18	20	225	85	150	190	115	150	70	15	0.5	0.4	14	5	16	160	130	110	5	M8	60	28	31	7x7x55	14.4	0.70
																	1	0.75	19	6	21.5	200	165	130	5	M10						
80		233	129	210	140	80	18	20	252	92	180	220	135	170	80	15	1	0.75	19	6	21.5	200	165	130	5	M10	65	32	35	10x8x60	20.0	0.99
																	2	1.5	24	8	27											
100		295	160	260	170	100	22	25	315	115	220	270	155	190	100	15	2	1.5	24	8	27	200	165	130	5	M10	75	38	41	10x8x65	39.0	1.87
																	3	2.2	28	8	31	250	215	180	5	M12						
120		334	175	290	190	120	22	25	395	155	260	320	180	230	120	18	3	2.2	28	8	31	250	215	180	5	M12	85	45	48	12x8x70	60.0	4.10
																	5	3.7	28	8	31											
135		380	202	320	210	135	27	30	455	185	290	350	200	250	135	18	5	3.7	28	8	31	250	215	180	5	M12	95	55	60	15x10x80	81.0	4.40
																	7.5	5.5	38	10	41	300	265	230	5	M12						
155	437	232	387	252	155	28	32	455	165	320	380	220	280	135	20	7.5	5.5	38	10	41	300	265	230	5	M12	110	60	65	15x10x95	96.0	7.00	
175	477	252	410	262	175	32	37	558	223	350	410	250	310	160	20	10	7.5	38	10	41	300	265	230	5	M12	110	65	69	18x11x95	145	8.00	