


C·B 馬達搭配剎車離合器規格表

馬達型號	出力 W	電壓 V	周波數 Hz	電流 A	起動 轉矩 kg/cm	定格		起動電容		齒輪型號 (另售)
CBI540-401	40	110	50 60	0.8	2.3	3.2	1350 1650	10.0	250	5GN-□K
CBI540-402	40	220	50 60	0.4	2.3	3.2	1350 1650	2.5	400	5GN-□K
CBI540-403	40	220	50 60	0.4	3.0 2.6	3.0 2.6	1350 1650	-	-	5GN-□K
CBI540-404	40	380	50 60	0.2	4.0 2.6	3.8 2.6	1350 1650	-	-	5GN-□K
CBI560-401	60	110	50 60	1.4	3.3	4.5	1350 1650	14.0	250	5GN-□K
CBI560-501	60	110	50 60	1.4	3.3	4.5	1350 1650	14.0	250	5GU-□K 5GU-□KB
CBI560-402	60	220	50 60	0.7	3.3	4.5	1350 1650	3.5	400	5GN-□K
CBI560-502	60	220	50 60	0.7	3.3	4.5	1350 1650	3.5	400	5GU-□K 5GU-□KB
CBI560-403	60	220	50 60	0.6	6.0 5.0	4.5 3.8	1350 1650	-	-	5GN-□K
CBI560-503	60	220	50 60	0.6	6.0 5.0	4.5 3.8	1350 1650	-	-	5GU-□K 5GU-□KB
CBI560-404	60	380	50 60	0.3	6.0 5.0	4.5 3.8	1350 1650	-	-	5GN-□K
CBI560-504	60	380	50 60	0.3	6.0 5.0	4.5 3.8	1350 1650	-	-	5GU-□K 5GU-□KB
CBI590-501	90	110	50 60	2.0	5.2	6.5	1350 1650	25	250	5GU-□K 5GU-□KB
CBI590-502	90	220	50 60	1.0	5.2	6.5	1350 1650	5.5	400	5GU-□K 5GU-□KB
CBI590-503	90	220	50 60	0.8	8.5 7.0	6.8 5.7	1350 1650	-	-	5GU-□K 5GU-□KB
CBI590-504	90	380	50 60	0.4	8.5 7.0	6.8 5.7	1350 1650	-	-	5GU-□K 5GU-□KB

和減速機/中間減速機結合時的容許轉矩 kgf-cm

回轉數 RPM	減速比	使用中間減速機時																
		600	300	200	120	100	60	50	30	20	15	10	6	5	3	2	1.5	1
50Hz	3	5	7.5	12.5	15	25	30	50	75	100	150	250	300	500	750	1000	1500	
60Hz	3.6	6	9	15	18	30	36	60	90	120	180	300	360	600	900	1200	1800	
40W/5GN□K	7.3	12	18	30	36	55	66	100	100	100	100	100	100	100	100	100	100	100
60W/5GN□K	11	18	27	41	49	74	89	100	100	100	100	100	100	100	100	100	100	100
60W/5GU□KB(5GU□K)	11	18	27	41	49	74	89	148	199	200	200	200	200	200	200	200	200	200
90W/5GU□KB(5GU□K)	17	28	41	62	74	112	134	200	200	200	200	200	200	200	200	200	200	200

離合剎車電動機的構造

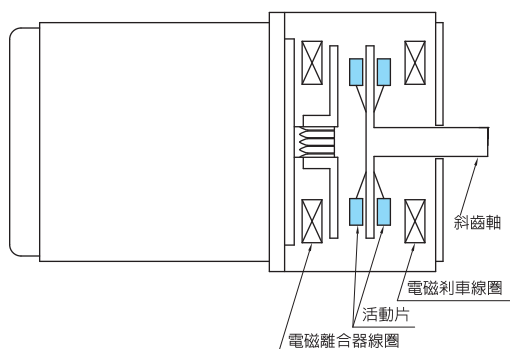

單相馬達附離合剎車器的結線圖

