


■ WF-X 螺旋齒系列外型 尺寸圖／表 L1

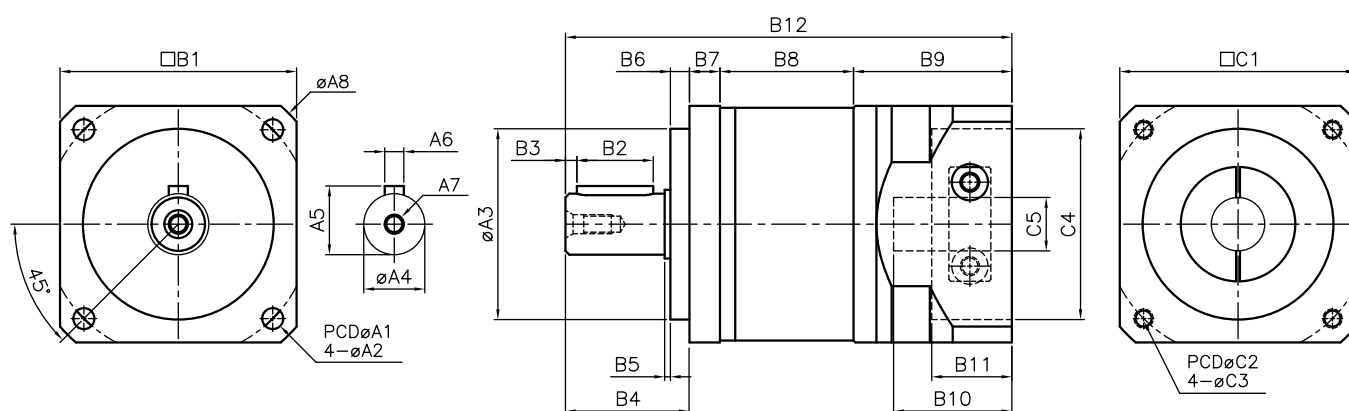

(單位:mm)

	Model Code	WF42X	WF60X	WF90X	WF115X	WF115XA	WF142X	WF142XA
		A	A1	50	70	100	130	145
A2	3.5		5.5	6.6	9	9	11	11
A3	35		50	80	110	110	130	130
A4	13		16	22	32	32	38	40
A5	15		18	24.5	35	35	41	43
A6	5		5	6	10	10	12	12
A7	M4x0.7P		M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M16x2.0P	M16x2.0P
A8	60		82	115	156	156	190	190
B	B1	46	62	88	116	116	142	142
	B2	15	20	30	40	40	55	65
	B3	2	3	3	5	5	5	5
	B4	25	32.5	47	64	64	81	92
	B5	1	1.5	2	2	2	3	3
	B6	5	5	5	10	10	10	10
	B7	8	8	11	14	14	15	15
	B8	23.5	35	45	47	47	56.6	56.6
	B9	33	41.5	57	71	71	104	104
	B10	26	31	43.5	56	56	82.5	82.5
	B11	17	21	34	8	8	20	20
	B12	89.5	117	160	196	196	256.5	267.5
C	C1	46	62	88	120	120	176	176
	C2	46	70	90	145	145	200	200
	C3	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M8x1.25P	M12x1.75P	M12x1.75P
	C4	30	50	70	110	110	114.3	114.3
	C5	5~8	6~14	14~24	16~24	16~24	24~42	24~42

1. B9~C5為標準的連接法蘭尺寸，實際尺寸會因馬達型號不同而變動，入力馬達記號如附表第149-150頁
 2. B12尺寸也會因所搭配伺服馬達不同而有改變，如需詳細外型尺寸請連絡本公司