


WF-D 螺旋齒系列外型 尺寸圖／表 L1

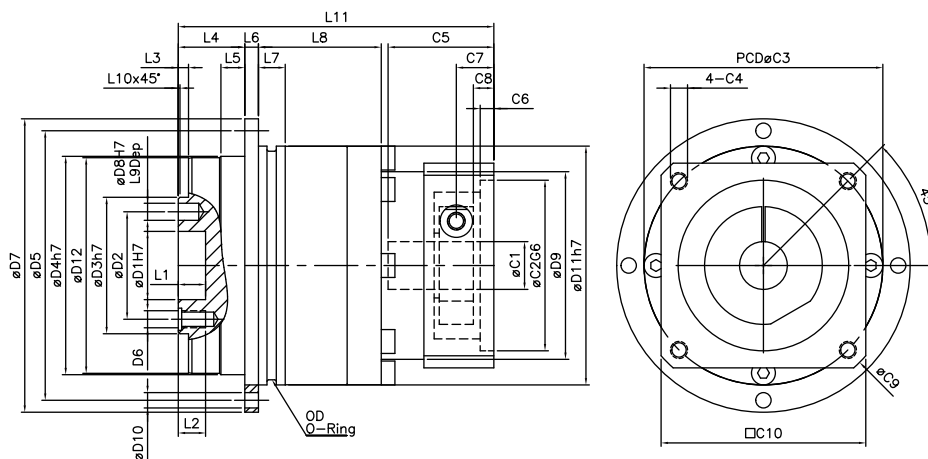

(單位:mm)

	Model Code	WF47D	WF64D	WF90D	WF110D
D	D1 _{H7}	12	20	31.5	40
	D2	20	31.5	50	63
	D3 _{H7}	28	40	63	80
	D4 _{H7}	47	64	90	110
	D5	67	79	109	135
	D6	4xM3x0.7P	7xM5x0.8P	7xM6x1.0P	11xM6x1.0P
	D7	72	86	118	145
	D8 _{H7}	3	5	5	6
	D9	43	55	78	88
	D10	8x3.4	8x3.4	8x5.5	8x5.5
	D11 _{H7}	60	70	95	120
	D12	46.2	63.2	89.2	109.2
L	L1	4	8	12	12
	L2	6.5	8	13.5	13.5
	L3	3	3	6	6
	L4	19.5	19.5	30	29
	L5	7	7	10	10
	L6	4	4	7	8
	L7	5	7.9	8	10
	L8	17	36	37	51.5
	L9	4	6	7	7
	L10	0.5	0.5	1	1
	L11	68	92.5	116.5	137
C	*C1 _{H7}	8	14	19	24
	*C2 _{H7}	30	50	70	110
	*C3	46	70	90	145
	*C4	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P
	*C5	30	31	45.5	56
	*C6	3	4	6	10
	*C7	8	11	14	25
	*C8	4	6	7	18
	*C9	56	80	116	160
	*C10	42	60	88	120
	OD	56x2	66x2	60x3	110x3

1.C1~C5為標準的連接法蘭尺寸，實際尺寸會因馬達型號不同而變動，入力馬達記號如附表第151頁

2.L11尺寸也會因所搭配伺服馬達不同而有改變，如需詳細外型尺寸請連絡本公司