


WF-H 螺旋齒系列外型 尺寸圖／表 L2

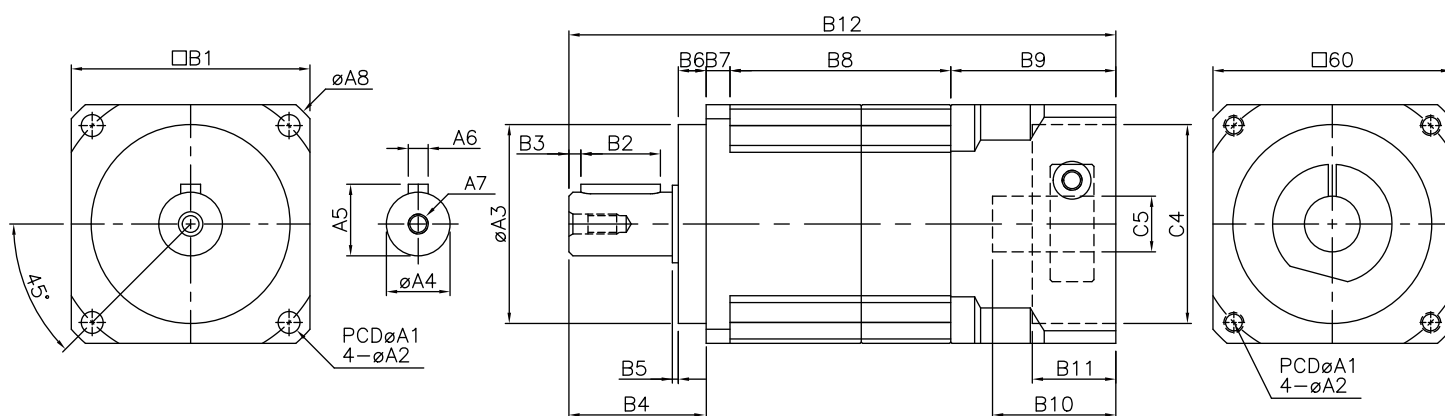

(單位:mm)

	Model Code	WF42H	WF60H	WF90H	WF115H	WF142H	WF180H
A	A1	50	70	100	130	165	215
	A2	3.5	5.5	6.8	8.6	11	13
	A3	35	50	80	110	130	160
	A4	13	16	22	32	40	55
	A5	15	18	24.5	35	43	60
	A6	5	5	6	10	12	16
	A7	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M16x2.0P	M20x2.5P
	A8	56	80	116	152	185	240
B	B1	42	60	90	115	142	180
	B2	15	20	30	40	65	70
	B3	2	3	3	5	5	6
	B4	25.5	34.5	51.5	66	97	105
	B5	1	1.5	1.5	2	3	3
	B6	5.5	7	10	12	15	20
	B7	4	6	8	10	12	15
	B8	39.5	55.5	70.5	47	102.5	115
	B9	33	41.5	55	70	98.5	98.5
	B10	26	31	43.5	56	83	87
	B11	17	21	30	8	20	8
	B12	102	137.5	185	193	310	333.5
C	C1	42	60	90	120	176	176
	C2	46	70	90	145	200	200
	C3	M4x0.7P	M5x0.8P	M6x1.0P	M8x1.25P	M12x1.75P	M12x1.75P
	C4	30	50	70	110	114.3	114.3
	C5	5~8	6~14	14~24	16~24	24~42	24~42

1. B9~C5為標準的連接法蘭尺寸，實際尺寸會因馬達型號不同而變動，入力馬達記號如附表第151-152頁
2. B12尺寸也會因所搭配伺服馬達不同而有改變，如需詳細外型尺寸請連絡本公司