



蝸輪-單段系統- PHN

PHN50~PHN175

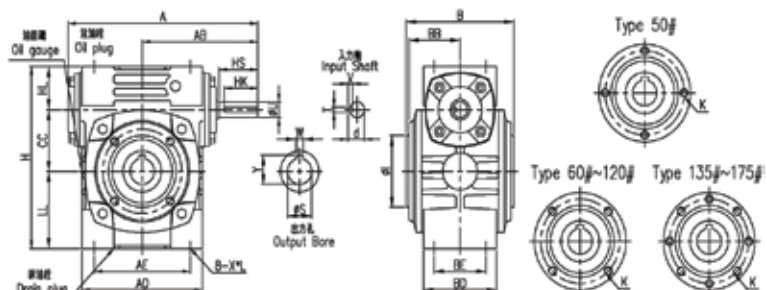

軸配置 SHAFT DIRECTION

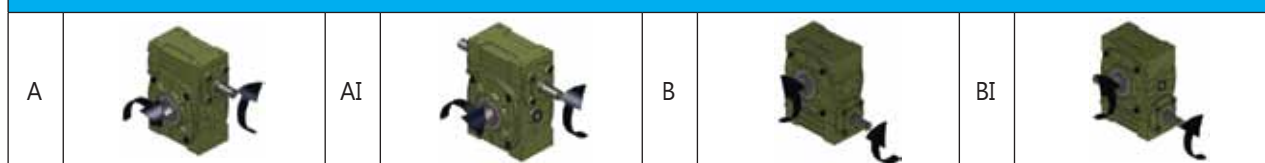

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	馬力 HP		A	AB	AD	AE	B	BB	BD	BE	CC	H	HL	I	K	LL	X*L	入力軸 Input Shaft				中空出力軸 Output Hollow			重量 (Kg)	油量 (l)
		1/10 ~1/30	1/40 ~1/60																HS	U	d	T×V×HK	S	W	Y		
50	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	1/4	1/8	175	105	115	90	99	46.5	68	50	50	150	35	58	Ø76*4-M6	65	M8*16	30	12	13.5	4x4x25	20	6	22.5	4.7	0.31
																							25	7	28		
60		1/2	1/4	198	120	127	100	112	53	78	54	60	177	42	70	Ø82*4-M8	75	M10*20	40	15	17	5x5x35	25	7	28	6.9	0.44
70		1	1/2	235	140	156	125	131	62	88	66	70	205	50	80	Ø100*4-M8	85	M10*20	40	18	20	5x5x35	30	7	33	11.9	0.70
80		2	1	264	160	176	145	144	68	101	75	80	232	60	95	Ø115*4-M10	92	M10*20	50	22	25	7x7x45	35	10	38	16.0	0.99
100		3	2	325	190	227	185	175	83	115	82	100	290	75	110	Ø130*4-M12	115	M12*24	50	25	28	7x7x45	40	12	43	35.0	1.87
120		5	3	389	230	264	220	200	95	132	100	120	370	95	130	Ø165*4-M12	155	M14*28	65	30	33	7x7x55	45	14	48.5	51.0	4.10
135		7.5	5	438	260	304	260	216	102.5	144	110	135	425	105	130	Ø200*8-M12	185	M16*32	75	35	38	10x8x65	55	15	60	72.0	4.40
155		10	7.5	510	302	340	280	270	109	160	120	155	423	103	180	Ø215.8*8-M12	165	M16*40	85	40	43	10x8x75	65	18	69	85.0	7.00
175		15	10	556	325	370	320	300	137	186	140	175	521	123	230	Ø265*8-M12	223	M16*40	85	45	48	12x8x75	80	22	85	125.0	8.00