


蝸輪-單段系統- PHSA

PHSA40~PHSA175

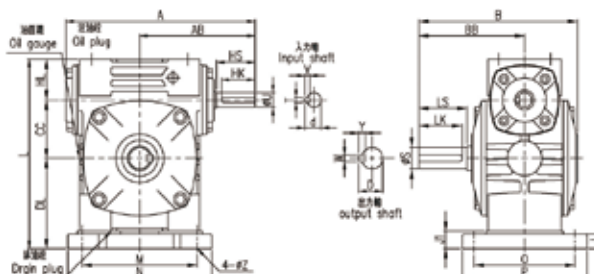

軸配置 SHAFT DIRECTION

R

L

D

I

K



尺寸表 DIMENSION *in millimeter

型 號 Size	減 速 比 Ratio	馬力 HP		A	AB	AD	AE	B	BB	BD	BE	CC	H	HL	LL	X*L	LL	LL	入力軸 Input Shaft				出力軸 Output Shaft				重 量 (Kg)	油 量 (l)
		1/10	1/40																HS	U	d	T×V×HK	S	W	Y	W×Y×LK		
		~1/30	~1/60																									
40	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	1/8	*	158	96	130	84	40	66	34	11	13	140	100	125	90	100	10	28	12	13.5	4x4x25	35	15	17	5x5x30	4.5	0.18
50		1/4	1/8	175	105	145	95	50	80	35	13	15	165	110	140	95	120	11	30	12	13.5	4x4x25	40	17	19	5x5x35	4.9	0.31
60		1/2	1/4	198	120	165	110	60	93	42	15	18	195	120	150	105	130	11	40	15	17	5x5x35	50	22	25	7x7x45	7.2	0.44
70		1	1/2	235	140	195	130	70	105	50	18	20	225	150	190	115	150	15	40	18	20	5x5x35	60	28	31	7x7x55	13.3	0.70
80		2	1	264	160	210	140	80	112	60	18	20	252	180	220	135	170	15	50	22	25	7x7x45	65	32	35	10x8x60	18.0	0.99
100		3	2	325	190	260	170	100	140	75	22	25	315	220	270	155	190	15	50	25	28	7x7x45	75	38	41	10x8x65	38.0	1.87
120		5	3	389	230	290	190	120	180	95	22	25	395	260	320	180	230	18	65	30	33	7x7x55	85	45	48	12x8x70	56.0	4.10
135		7.5	5	438	260	320	210	135	215	105	27	30	455	290	350	200	250	18	75	35	38	10x8x65	95	55	60	15x10x80	78.0	4.40
155	10	7.5	510	302	387	252	155	197	103	28	32	455	320	380	220	280	20	85	40	43	10x8x75	110	60	65	15x10x95	92.0	7.00	
175	15	10	556	325	410	262	175	260	123	32	37	558	350	410	250	310	20	85	45	48	12x8x75	110	65	69	18x11x95	142.0	8.00	