


CH..S..SB 臥式附三相減速馬達外型尺寸圖

■ CH..S 臥式附三相鋁/鐵殼(剎車)馬達減速機

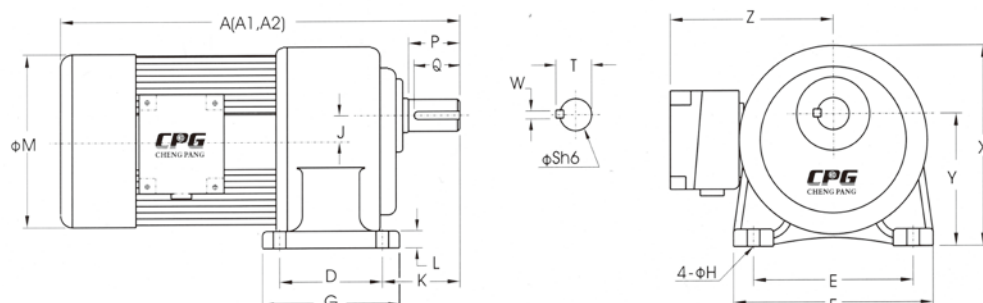

出力軸尺寸 OUTPUT SHAFT					
出力軸 SHAFT	P	鍵槽 KEYWAY		鍵 KEY	
Sh6		W	T	Q	SPEC'
φ18	30	5	20.2	27	5*5*27
φ22	40	7	25	35	7*7*35
φ28	45	7	31.1	40	7*7*40
φ32	55	10	35.5	50	10*8*50
φ40	65	10	43.5	60	10*8*60
φ50	80	14	54	75	14*9*75

DIMENSIONS (M/M)

適用機型：CH..S, CH..ST, CH..SB, CH..STB

馬力 KW	減速比 RATIO	本體 CODE	型番 SIZE(S)	A	A1	A2	D	E	F	G	H	J	K	L	M	X	Y	Z
100W 1/8 HP	3-50	1 #	18	250	250	250	40	110	135	65	9	16	50	10	133	138	88.5	120
	60-200	2 #	22	280	280	280	65	130	158	90	11	17.5	60	13	133	152	97.5	120
200W 1/4 HP	3-10	1 #	18	285	285	285	40	110	135	65	9	16	50	10	133	138	88.5	120
	15-90	2 #	22	315	315	315	65	130	158	90	11	17.5	60	13	133	152	97.5	120
	100-200	3 #	28	350	350	350	90	140	178	120	11	23	68	17	133	178	116	120
400W 1/2 HP	3-10	2 #	22	330	330	330	65	130	158	90	11	17.5	60	13	167	152	97.5	135
	15-90	3 #	28	360	360	360	90	140	178	120	11	23	68	17	167	178	116	135
	100-200	4 #	32	395	395	395	130	170	215	165	13	30	70	23	167	216	140	135
750W 1 HP	3-25	3 #	28	380	380	380	90	140	178	120	11	23	68	17	167	178	116	135
	30-120	4 #	32	410	410	410	130	170	215	165	13	30	70	23	167	216	140	135
	125-200	5 #	40	465	465	465	150	210	265	198	15	36	89	24	167	250	162	135
1500W 2 HP	3-30	4 #	32	450	450	450	130	170	215	165	13	30	70	23	192	216	140	146
	40-100	5 #	40	510	510	510	150	210	265	198	15	36	89	24	192	250	162	146
	110-180	6 #	50	560	560	560	170	265	319	238	18	51	120	31.5	192	308	200	146
2200W 3 HP	3-40	5 #	40	520	520	520	150	210	265	198	15	36	89	24	220	250	162	160
	45-100	6 #	50	580	580	580	170	265	319	238	18	51	120	31.5	220	308	200	160
3700W 5 HP	3-10	5 #	40	560	560	560	150	210	265	198	15	36	89	24	220	250	162	160
	15-60	6 #	50	620	620	620	170	265	319	238	18	51	120	31.5	220	308	200	160

備註：A：三相鋁殼馬達，WITH 3-PHASE ALUMINUM MOTOR。
A1：三相鐵殼馬達，WITH 3-PHASE STEEL PLATE MOTOR。
A2：三相馬達附剎車器，WITH 3-PHASE BRAKE MOTOR。