


CHD 臥式雙軸齒輪減速機外型尺寸圖

臥式雙軸 HORIZONTAL TYPE

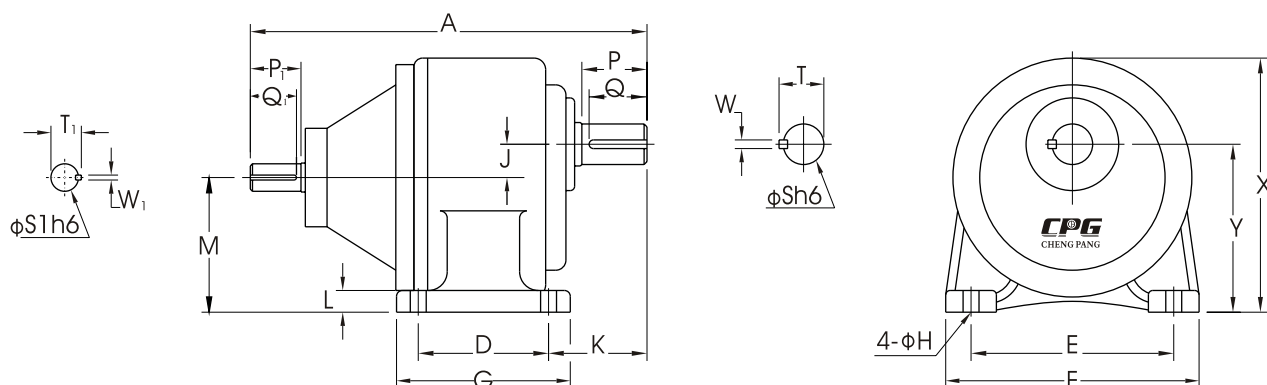

入力軸尺寸 INPUT SHAFT

入力軸 SHAFT			鍵槽 KEYWAY			鍵 KEY
KW	S1 h6	P1	W1	T1	Q1	SPEC'
0.1/0.2	14	25	5	16.2	22	5*5*22
0.4	16	30	5	18.2	27	5*5*27
0.75	19	40	6	21.7	35	6*6*35
1.5	24	50	8	27.1	45	8*7*45
2.2	28	55	8	31.1	50	8*7*50
3.7	28	55	8	31.1	50	8*7*50

出力軸尺寸 OUTPUT SHAFT

型番 SIZE(S)	出力軸 SHAFT		鍵槽 KEYWAY			鍵 KEY
	Sh6	P	W	T	Q	SPEC'
18	φ 18	30	5	20.2	27	5*5*27
22	φ 22	40	7	25	35	7*7*35
28	φ 28	45	7	31.1	40	7*7*40
32	φ 32	55	10	35.5	50	10*8*50
40	φ 40	65	10	43.5	60	10*8*60
50	φ 50	80	14	54	75	14*9*75



臥式雙軸 HORIZONTAL TYPE (Dimension in mm)

馬力 KW	減速比 RATIO	型番 SIZE(S)	A	D	E	F	G	H	J	K	L	M	X	Y
100W 1/8HP	3-50	18	165	40	110	135	65	9	16	50	10	72.5	138	88.5
	60-200	22	195	65	130	158	90	11	17.5	60	13	80	152	97.5
200W 1/4 HP	3-10	18	165	40	110	135	65	9	16	50	10	72.5	138	88.5
	15-90	22	195	65	130	158	90	11	17.5	60	13	80	152	97.5
	100-200	28	255	90	140	178	120	11	23	68	17	93	178	116
400W 1/2 HP	3-10	22	235	65	130	158	90	11	17.5	60	13	80	152	97.5
	15-90	28	265	90	140	178	120	11	23	68	17	93	178	116
	100-200	32	300	130	170	210	165	13	30	70	23	110	212	140
750W 1 HP	3-25	28	275	90	140	178	120	11	23	68	17	93	178	116
	30-120	32	310	130	170	210	165	13	30	70	23	110	212	140
	125-200	40	365	150	210	265	198	15	36	89	24	126	250	162
1500W 2 HP	3-30	32	320	130	170	210	165	13	30	70	23	110	212	140
	40-100	40	373	150	210	265	198	15	36	89	24	126	250	162
2200W 3 HP	3-40	40	390	150	210	265	198	15	36	89	24	126	250	162
	45-100	50	450	170	265	321	238	18	51	120	31.5	149	308	200
3700W 5 HP	3-10	40	390	150	210	265	198	15	36	89	24	126	250	162
	15-60	50	450	170	265	321	238	18	51	120	31.5	149	308	200