


蝸輪-單段系統- PHSN

PHSN40~PHSN175



軸配置 SHAFT DIRECTION

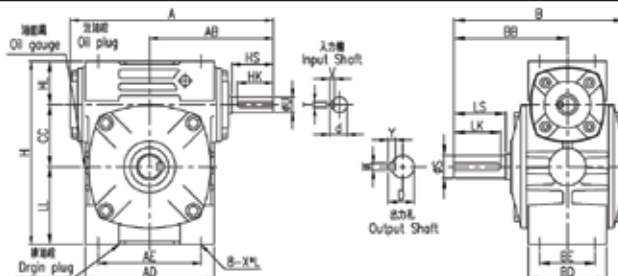

尺寸表 DIMENSION *in millimeter

型號 Size	減速比 Ratio	馬力 HP		A	AB	AD	AE	B	BB	BD	BE	CC	H	HL	LL	X*L	入力軸 Input Shaft				出力軸 Output Shaft				重量 (Kg)	油量 (l)
		1/10 ~1/30	1/40 ~1/60														HS	U	d	T×V×HK	S	W	Y	W×Y×LK		
40	(特殊) 1:5 (標準) 1:10 1:15 1:20 1:30 1:40 1:50 1:60	1/8	*	158	96	102	80	130	84	68	54	40	127	34	53	M8*16	28	12	13.5	4x4x25	35	15	17	5x5x30	4.1	0.17
50		1/4	1/8	175	105	115	90	145	95	68	50	50	150	35	65	M8*16	30	12	13.5	4x4x25	40	17	19	5x5x35	4.7	0.31
60		1/2	1/4	198	120	127	100	165	110	78	54	60	177	42	75	M10*20	40	15	17	5x5x35	50	22	25	7x7x45	6.9	0.44
70		1	1/2	235	140	156	125	195	130	88	66	70	205	50	85	M10*20	40	18	20	5x5x35	60	28	31	7x7x55	11.9	0.70
80		2	1	264	160	176	145	210	140	101	75	80	232	60	92	M10*20	50	22	25	7x7x45	65	32	35	10x8x60	16.0	0.99
100		3	2	325	190	227	185	260	170	115	85	100	290	75	115	M12*24	50	25	28	7x7x45	75	38	41	10x8x65	35.0	1.87
120		5	3	389	230	264	220	290	190	132	100	120	370	95	155	M14*28	65	30	33	7x7x55	85	45	48	12x8x70	51.0	4.10
135		7.5	5	438	260	304	260	320	210	144	110	135	425	105	185	M16*32	75	35	38	10x8x65	95	55	60	15x10x80	72.0	4.40
155	10	7.5	510	302	340	280	387	252	160	120	155	423	103	165	M16*40	85	40	43	10x8x75	110	60	65	15x10x95	90.0	7.00	
175	15	10	556	325	370	320	410	262	186	140	175	521	123	223	M16*40	85	45	48	12x8x75	110	65	69	18x11x95	132.0	8.00	